



Soft Fast Recovery Rectifier

Features

- Fast switching speed for high efficiency
- Low reverse leakage
- High forward surge current capacity
- High temperature soldering guaranteed:
260°C/10 seconds, 0.375" (9.5mm) lead length
- RoHS and REACH Compliance

Mechanical Data

Case:	Transfer molded plastic
Polarity:	Color band denots cathode end
Epoxy:	UL94V-0 rate flame retardant
Lead:	Plated axial lead, solderable per MIL-STD-202E method 208C
Mounting position:	Any
Weight:	0.07 ounce, 2.0 gram

Maximum Ratings ($T_{Ambient}=25^{\circ}C$ unless noted otherwise)

Symbol	Description	SFR601	SFR602	SFR603	SFR604	SFR605	SFR606	SFR607	Unit	Conditions
VRRM	Max Recurrent Peak Reverse Voltage	50	100	200	400	600	800	1000	V	
VRMS	Max RMS Voltage	35	70	140	280	420	560	700	V	
VDC	Max DC Blocking Voltage	50	100	200	400	600	800	1000	V	
I(AV)	Max Average Forward Rectified Current	6.0							A	TC=55°C
IFSM	Peak Forward Surge Current	300							A	JEDEC method
TJ,TSTG	Operating and Storage Temperature Range	-55 to +125, -55 to +150							°C	
Rθ-JA	Typical Thermal Resistance	10							°C/W	Note 2

Electrical Characteristics ($T_{Ambient}=25^{\circ}C$ unless noted otherwise)

Symbol	Description	SFR601	SFR602	SFR603	SFR604	SFR605	SFR606	SFR607	Unit	Conditions
VF	Max Instantaneous Forward Voltage	1.3							V	6.0A
IR	Max DC Reverse Current at Rated DC Blocking Voltage	25							μA	TA=25°C
		1.0							mA	TA=100°C
TRR	Maximum reverse recovery time	100		150			200		nS	Note 1

Note:

1. Reverse recovery test conditions: $I_F=0.5A$, $I_R=1.0A$, $I_{RR}=0.25A$
2. Thermal resistance from junction to ambient with 0.375" (9.5mm) lead length, PCB mounted

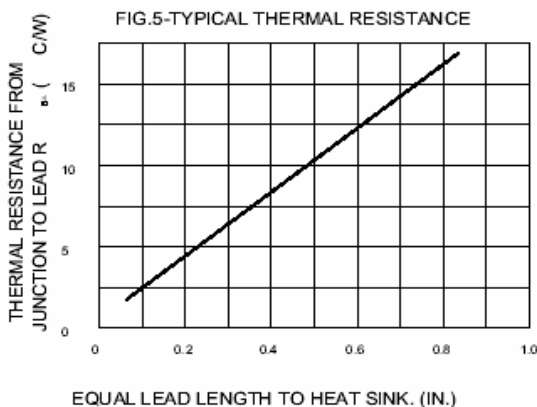
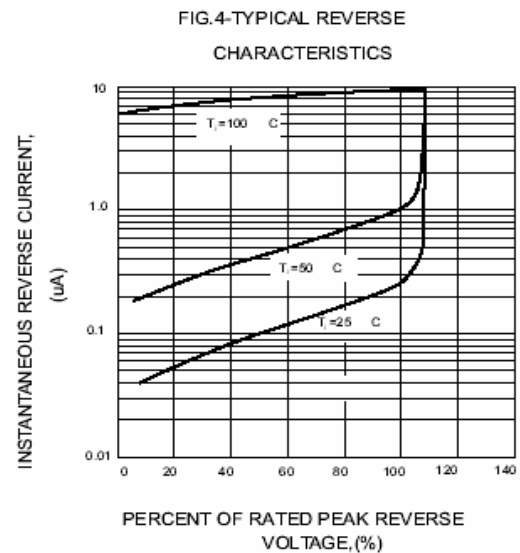
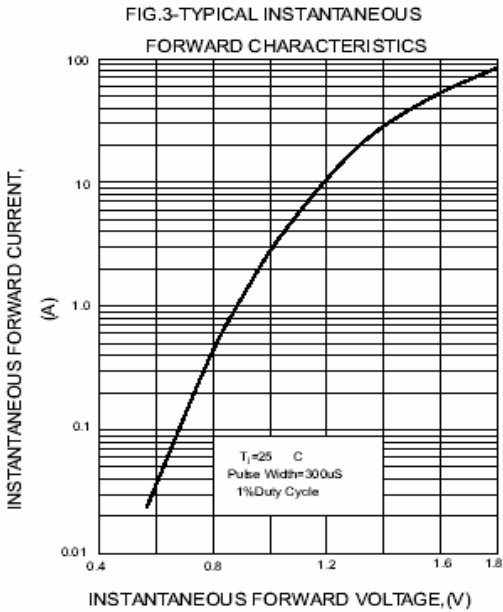
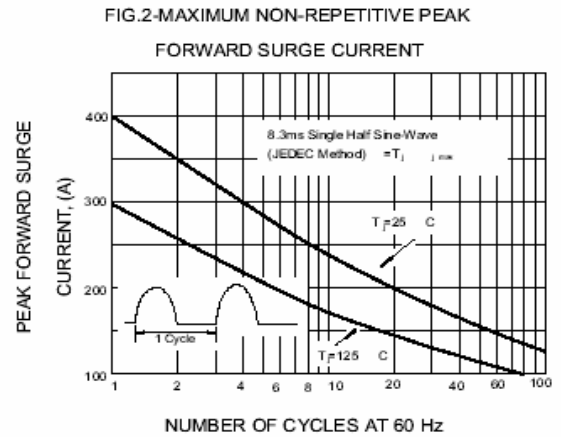
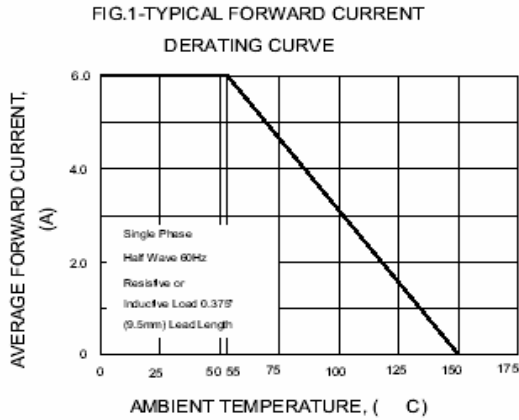
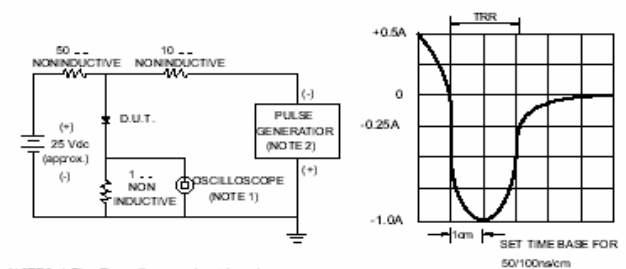
SFR601 ~ SFR607
RATINGS AND CHARACTERISTIC CURVES SFR601 THRU SFR607


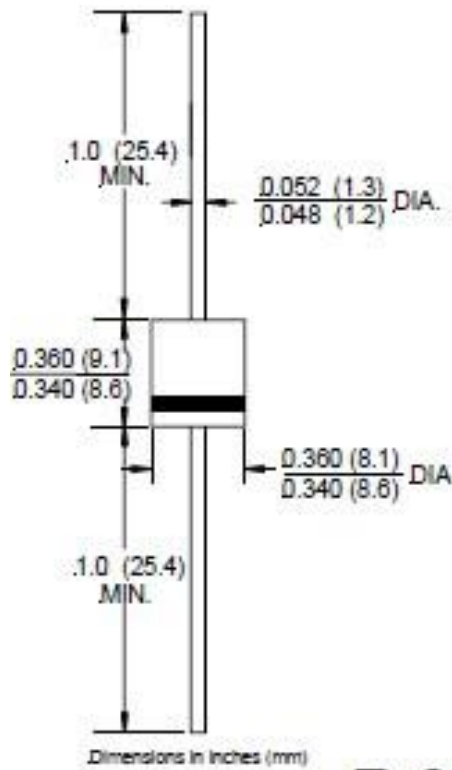
FIG.6-TEST CIRCUIT DIAGRAM AND REVERSE RECOVERY TIME CHARACTERISTIC



NOTES: 1. Rise Time =7ns max. Input Impedance= 1 megohm, 22pF
2. Rise time=10ns max. Source Impedance= 50 ohms

SFR601 ~ SFR607

Dimensions in inches (mm)



R-6

Contact us:

US HEADQUARTERS

MEI SEMI INC.

2902 Corvin Drive, Santa Clara, CA95051, USA

Tel: 1-408-733-0808 Fax: 1-408-733-2828