



SURFACE MOUNT GLASS PASSIVATED RECTIFIER S2AA~ S2MA

Surface Mount Glass Passivated Rectifier

Features

- Glass passivated chip junction
- Built in strain relief
- High current capability
- Low forward voltage drop
- Fast switching speed for high efficiency
- High temperature Soldering guaranteed: 260°C / 10 seconds at terminals
- RoHS and REACH compliance



DO-214AC (SMA)



RoHS
COMPLIANT

Mechanical Data

Case:	JEDEC DO-214AC(SMA), transfer molded plastic
Epoxy:	Meets UL 94V-0 flammability rating
Terminals:	Solder plated, solderable per MIL-STD 750, Method 2026
Polarity:	Cathode indicated by color band
Mounting position:	Any
Weight:	0.064 gram

Maximum Ratings ($T_{Ambient}=25^{\circ}C$ unless noted otherwise)

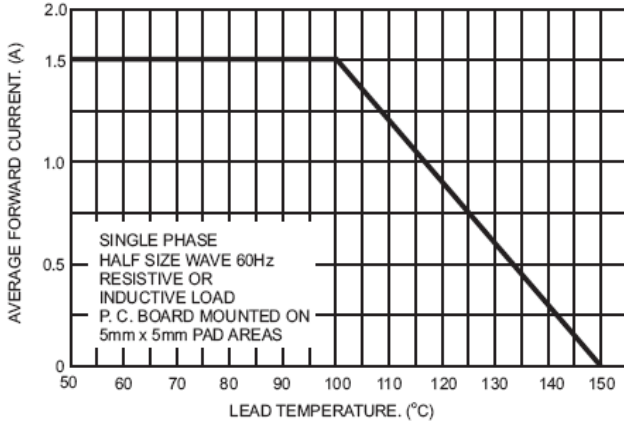
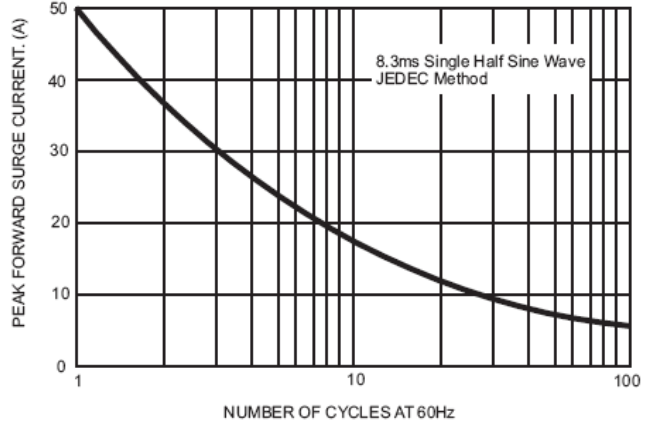
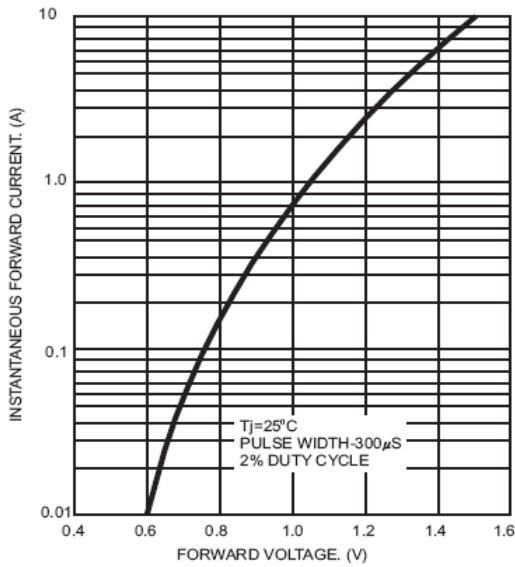
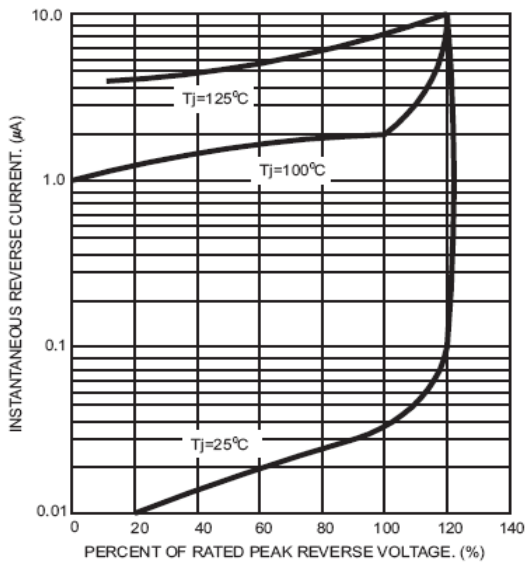
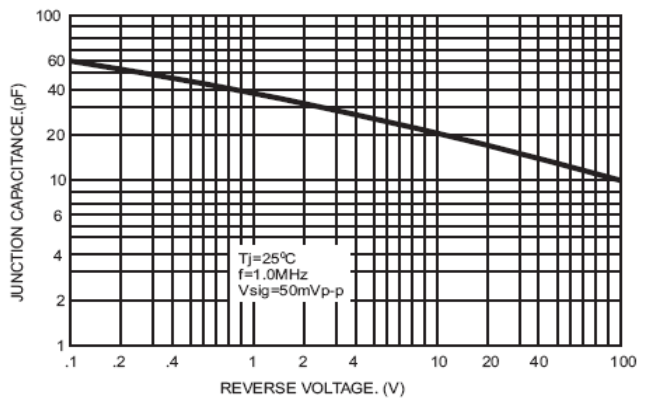
Symbol	Description	S2AA	S2BA	S2DA	S2GA	S2JA	S2KA	S2MA	Unit	Conditions
VRRM	Max Recurrent Peak Reverse Voltage	50	100	200	400	600	800	1000	V	
VRMS	Max RMS Voltage	35	70	140	280	420	560	700	V	
VDC	Max DC Blocking Voltage	50	100	200	400	600	800	1000	V	
I(AV)	Max Average Forward Rectified Current at Ambient Temperature	1.5							A	TL=100°C (note 2)
IFSM	Peak Forward Surge Current	50							A	8.3ms single half sine-wave (JEDEC)
trr	Maximum Reverse Recovery Time	2.0							μS	IF=0.5A, IR=1.0A, IRR=0.25A
TJ,TSTG	Operating and Storage Temperature Range	-55 to +150							°C	

Electrical Characteristics ($T_{Ambient}=25^{\circ}C$ unless noted otherwise)

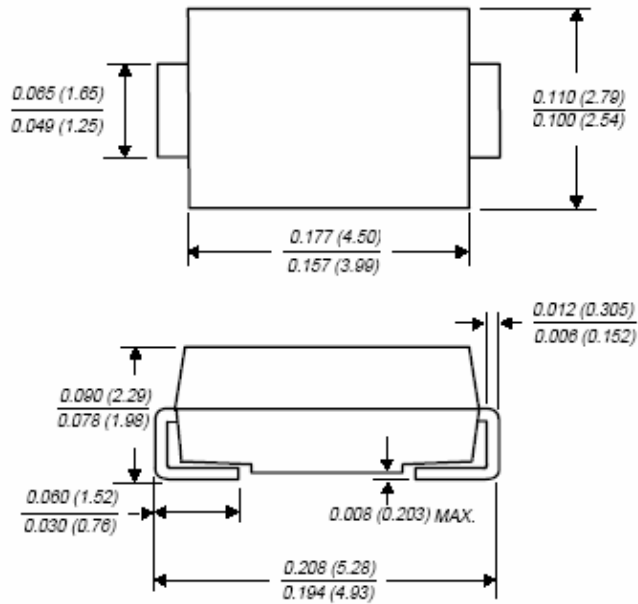
Symbol	Description	S2AA	S2BA	S2DA	S2GA	S2JA	S2KA	S2MA	Unit	Conditions
VF	Max Instantaneous Forward Voltage	1.15							V	IF(AV)= 1.0A
IR	Max DC Reverse Current at Rated DC Blocking Voltage	5							μA	TA=25°C
		125								TA=125°C
CJ	Typical Junction Capacitance	30							pF	At 1MHz, reversed voltage of 4V
Rθ-JA	Typical Thermal Resistance	53							°C/W	Note 2
Rθ-JL		16								

Note:

1. Single phase, half wave, 60Hz, resistive or inductive load. Derate current by 20% for capacitive load
2. Thermal Resistance, PCB mounted

Typical Characteristics Curves
FIG.1- MAXIMUM FORWARD CURRENT DERATING CURVE

FIG.2- MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

FIG.3- TYPICAL FORWARD CHARACTERISTICS

FIG.4- TYPICAL REVERSE CHARACTERISTICS

FIG.5- TYPICAL JUNCTION CAPACITANCE


Dimensions in inch (mm)

*Dimensions in inches and (millimeters)***DO-214AC(SMA)****Contact us:****US HEADQUARTERS****MEI SEMI INC.****2902** Corvin Drive, Santa Clara, CA95051, USA

Tel: 1-408-733-0808 Fax: 1-408-733-2828