



## Super Fast Glass Passivated Rectifier

### Features

- Low power loss, high efficiency
- Low leakage
- High Surge Capacity
- Glass passivated chip junction
- Super fast switching speed
- High temperature soldering guaranteed:  
260°C/10 seconds, 0.375" (9.5mm) lead length
- RoHS and REACH Compliance



### Mechanical Data

<b>Case:</b>	Transfer molded plastic
<b>Polarity:</b>	Color band denotes cathode end
<b>Epoxy:</b>	UL94V-0 rate flame retardant
<b>Lead:</b>	Plated axial lead, solderable per MIL-STD-202E Method 208C
<b>Mounting Position:</b>	Any
<b>Weight:</b>	0.042 ounce, 1.19 gram

### Maximum Ratings ( $T_{Ambient}=25^{\circ}C$ unless noted otherwise)

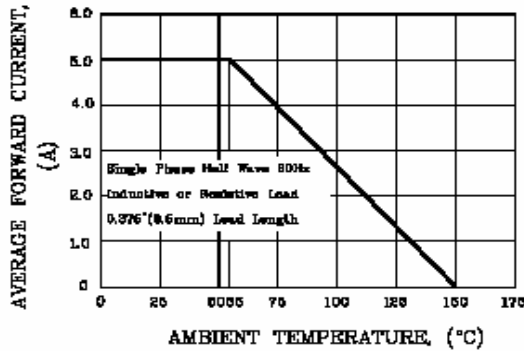
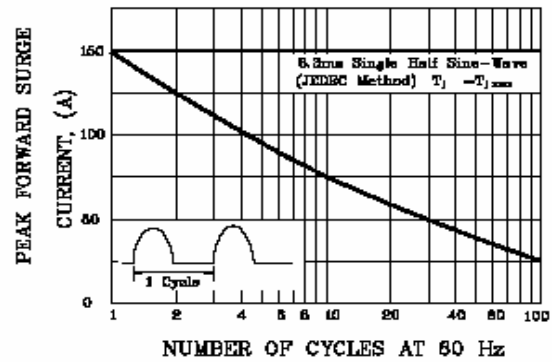
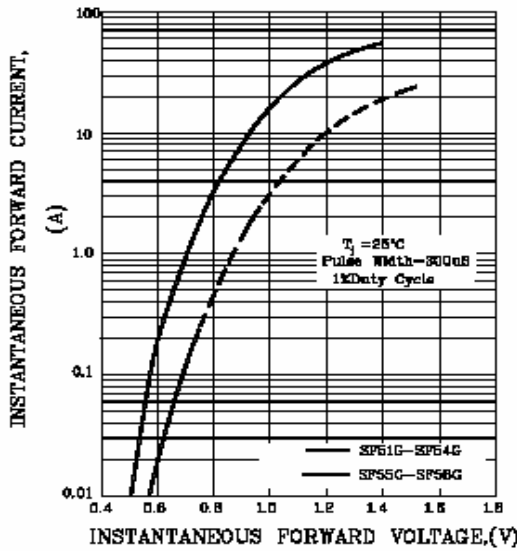
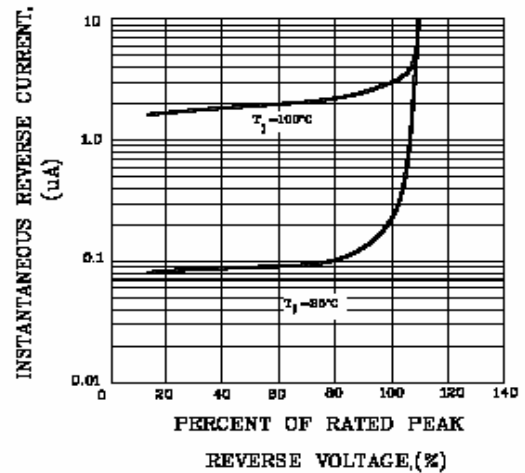
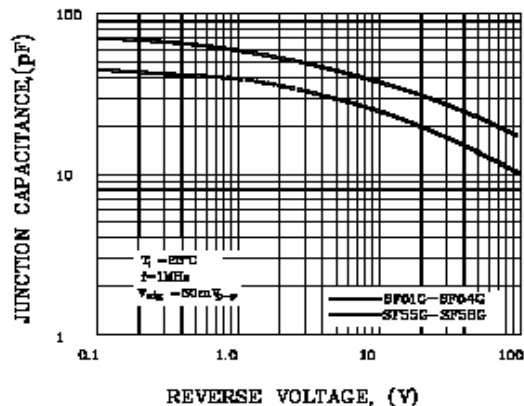
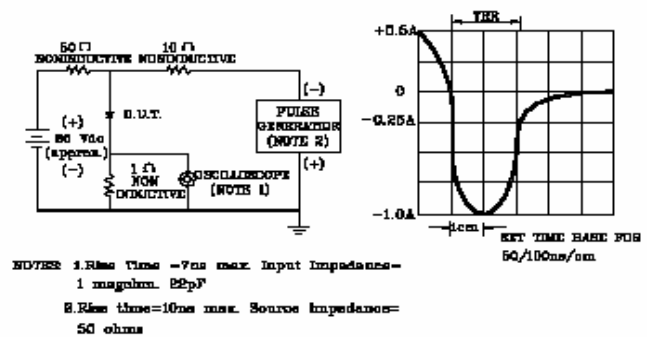
Symbol	Description	SF51G	SF52G	SF53G	SF54G	SF55G	SF56G	SF57G	SF58G	Unit	Conditions
<b>VRRM</b>	Max Recurrent Peak Reverse Voltage	50	100	150	200	300	400	500	600	V	
<b>VRMS</b>	Max RMS Voltage	35	70	105	140	210	280	350	420	V	
<b>VDC</b>	Max DC Blocking Voltage	50	100	150	200	300	400	500	600	V	
<b>I(AV)</b>	Max Average Forward Rectified Current 0.375" (9mm) lead length	5.0								A	TA=55°C Note 2
<b>IFSM</b>	Peak Forward Surge Current	150								A	JEDEC method
<b>TJ,TSTG</b>	Operating and Storage Temperature Range	-55 to +150, -55 to +150								°C	
<b>Rθ-JA</b>	Typical Thermal Resistance	30								°C/W	Note 2

### Electrical Characteristics ( $T_{Ambient}=25^{\circ}C$ unless noted otherwise)

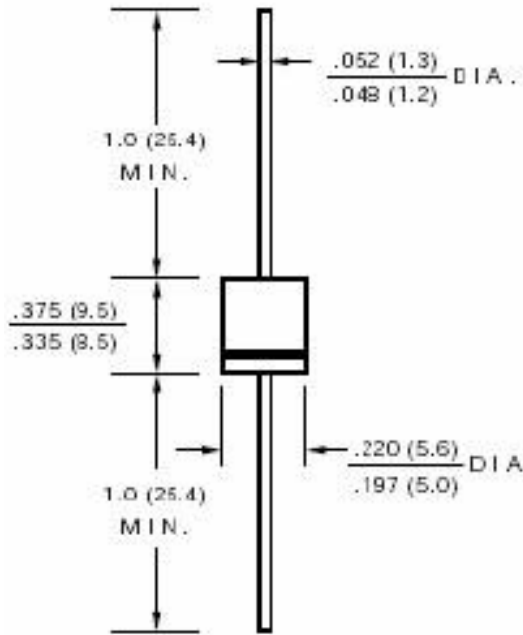
Symbol	Description	SF51G	SF52G	SF53G	SF54G	SF55G	SF56G	SF57G	SF58G	Unit	Conditions
<b>VF</b>	Max Instantaneous Forward Voltage	0.95		1.25			1.7			V	5.0A
<b>IR</b>	Max DC Reverse Current at Rated DC Blocking Voltage	5.0								µA	TA=25°C
		50									TA=125°C
<b>TRR</b>	Maximum reverse recovery time	35								nS	Note 1
<b>CJ</b>	Typical Junction capacitance	50				30				pF	Measured at 1.0MHz / 4.0V

**Note:**

1. Reverse recovery test conditions:  $I_F=0.5A$ ,  $I_R=1.0A$ ,  $I_{RR}=0.25A$
2. Thermal resistance from junction to ambient with 0.375" (9.5mm) lead length, PCB mounted

**SF51G ~ SF58G**
**RATINGS AND CHARACTERISTIC CURVES SF51G THRU SF58G**
**FIG.1-TYPICAL FORWARD CURRENT DERATING CURVE**

**FIG.2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT**

**FIG.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS**

**FIG.4-TYPICAL REVERSE CHARACTERISTICS**

**FIG.5-TYPICAL JUNCTION CAPACITANCE**

**FIG.6-TEST CIRCUIT DIAGRAM AND REVERSE RECOVERY TIME CHARACTERISTIC**


Dimensions in inches (mm)



DO-27

Contact us:

**US HEADQUARTERS**

MEI SEMI INC.

2902 Corvin Drive, Santa Clara, CA95051, USA

Tel: 1-408-733-0808 Fax: 1-408-733-2828