



Ultra Fast Glass Passivated Rectifier

Features

- Fast switching for high efficiency
- Glass passivated chip junction
- Low reverse leakage
- High forward surge current capability
- High temperature soldering guaranteed:
260°C/10 seconds, 0.375" (9.5mm) lead length
- RoHS and REACH Compliance



Mechanical Data

Case:	Transfer molded plastic
Polarity:	Color band denotes cathode end.
Epoxy:	UL94V-0 rate flame retardant
Lead:	Plated axial lead, solderable per MIL-STD-202E Method 208C
Mounting Position:	Any
Weight:	0.014 ounce, 0.39 gram

Maximum Ratings ($T_{Ambient}=25^{\circ}C$ unless noted otherwise)

Symbol	Description	UF2001G	UF2002G	UF2003G	UF2004G	UF2005G	UF2006G	UF2007G	Unit	Conditions
VRRM	Max Recurrent Peak Reverse Voltage	50	100	200	400	600	800	1000	V	
VRMS	Max RMS Voltage	35	70	140	280	420	560	700	V	
VDC	Max DC Blocking Voltage	50	100	200	400	600	800	1000	V	
I(AV)	Max Average Forward Rectified Current 0.375" (9mm) lead length	2.0							A	TL=75°C
IFSM	Peak Forward Surge Current, 8.3ms single half sine – wave superimposed on rated load	60							A	JEDEC method
TJ,TSTG	Operating and Storage Temperature Range	-65 to +150							°C	

Electrical Characteristics ($T_{Ambient}=25^{\circ}C$ unless noted otherwise)

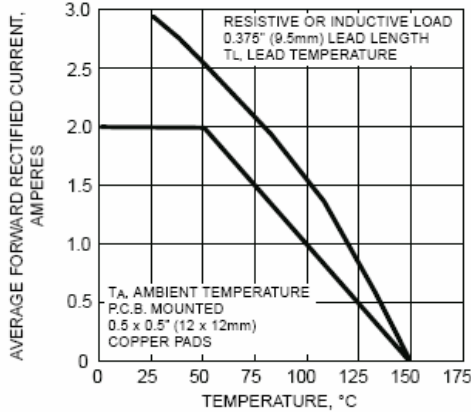
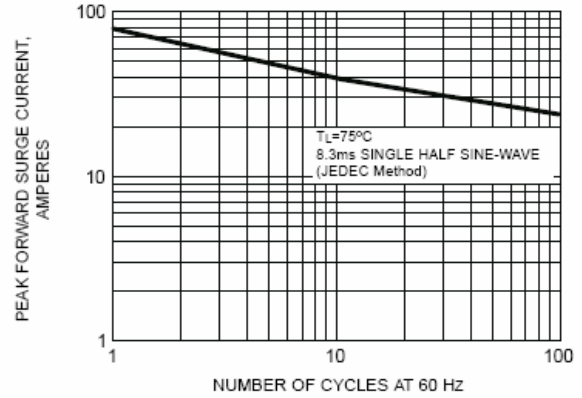
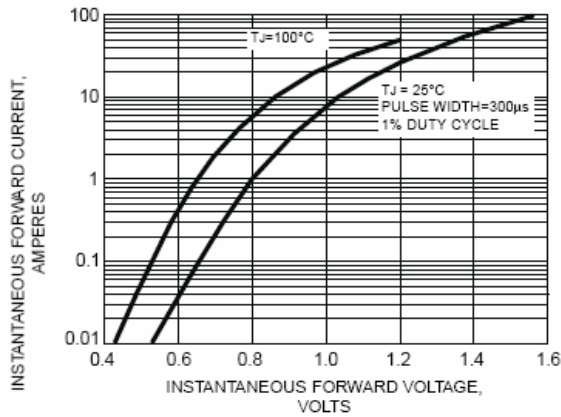
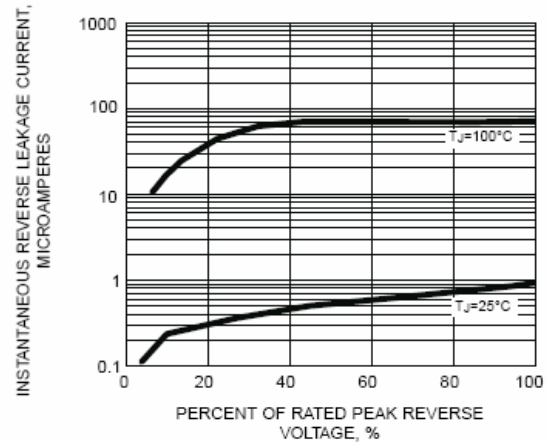
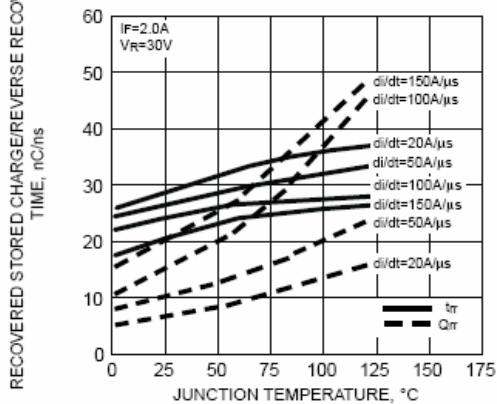
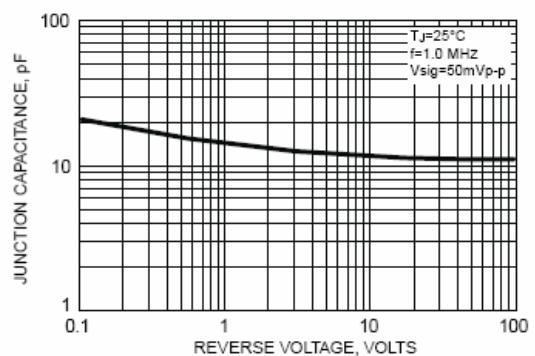
Symbol	Description	UF2001G	UF2002G	UF2003G	UF2004G	UF2005G	UF2006G	UF2007G	Unit	Conditions
VF	Max Instantaneous Forward Voltage	1.0							V	2.0A
Rθ-JA	Typical Thermal Resistance	45							°C/W	Note 2
IR	Max DC Reverse Current at Rated DC Blocking Voltage	10							µA	TA=25°C
		50								TA=125°C
TRR	Maximum reverse recovery time	50			75				nS	Note 1
CJ	Typical Junction capacitance	15							pF	Measured at 1.0MHz/4.0V

Note:

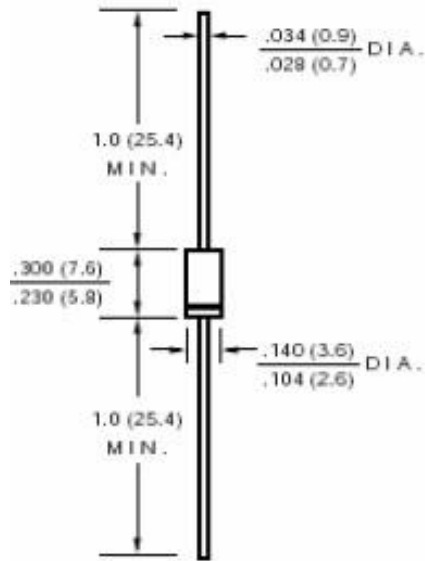
1. Test conditions: $I_F=0.5A$, $I_R=1.0A$, $I_{RR}=0.25A$
2. Thermal resistance from junction to ambient with 0.375" (9.5mm) lead length, P.C.B mounted.

UF2001G ~ UF2007G

RATINGS AND CHARACTERISTIC CURVES UF2001G THRU UF2007G

FIG. 1 - MAXIMUM FORWARD CURRENT DERATING CURVES

FIG. 2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

FIG. 3 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

FIG. 4 - TYPICAL REVERSE LEAKAGE CHARACTERISTICS

FIG. 5 - REVERSE SWITCHING CHARACTERISTICS

FIG. 6 - TYPICAL JUNCTION CAPACITANCE


Dimensions in inches (mm)



DO-15

Contact us:

US HEADQUARTERS

MEI SEMI INC.

2902 Corvin Drive, Santa Clara, CA95051, USA

Tel: 1-408-733-0808 Fax: 1-408-733-2828