

JCS15N65H

主要参数 MAIN CHARACTERISTICS

I_D	15.0 A
V_{DS}	650 V
$R_{dson-Max}$ (@ $V_{GS}=10V$)	0.55 Ω
Q_g-Typ	35.2 nC

用途

- 高频开关电源
- 电子镇流器
- LED 电源

产品特性

- 低栅极电荷
- 低 C_{RSS} (典型值 10pF)
- 开关速度快
- 产品全部经过雪崩测试
- 高抗 dv/dt 能力
- RoHS 产品


APPLICATIONS

- High efficiency switch mode power supplies
- Electronic lamp ballasts based on half bridge
- LED power supplies

FEATURES

- Low gate charge
- Low C_{RSS} (typical 10pF)
- Fast switching
- 100% avalanche tested
- Improved dv/dt capability
- RoHS product

封装 Package

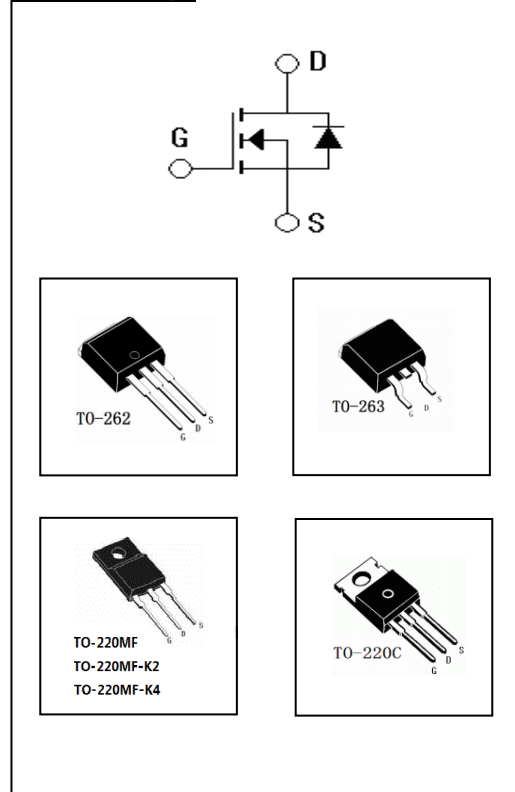

订货信息 ORDER MESSAGE

订货型号 Order codes				印 记 Marking	封 装 Package
有卤-条管 Halogen-Tube	无卤-条管 Halogen-Free-Tube	有卤-编带 Halogen-Reel	无卤-编带 Halogen-Free -Reel		
JCS15N65FH-F-B	JCS15N65FH-F-BR	N/A	N/A	JCS15N65FH	TO-220MF
JCS15N65FH-F2-B	JCS15N65FH-F2-BR	N/A	N/A	JCS15N65FH	TO-220MF-K2
JCS15N65FH-F4-B	JCS15N65FH-F4-BR	N/A	N/A	JCS15N65FH	TO-220MF-K4
JCS15N65BH-B-B	JCS15N65BH-B-BR	N/A	N/A	JCS15N65BH	TO-262
JCS15N65SH-S-B	JCS15N65SH-S-BR	JCS15N65SH-S-A	JCS15N65SH-S-AR	JCS15N65SH	TO-263
JCS15N65CH-C-B	JCS15N65CH-C-BR	N/A	N/A	JCS15N65CH	TO-220C

绝对最大额定值 ABSOLUTE RATINGS (Tc=25℃)

项 目 Parameter	符 号 Symbol	数 值 Value			单 位 Unit
		JCS15N65CH/ BH/SH	JCS15N65FH(TO-220MF)	JCS15N65FH(TO-220MF-K2/ K4)	
最高漏极-源极直流电压 Drain-Source Voltage	V _{DSS}	650			V
连续漏极电流 Drain Current-continuous	I _D T=25℃ T=100℃	15*			A
		9.5*			A
最大脉冲漏极电流 (注1) Drain Current – pulse (note 1)	I _{DM}	60.0*			A
最高栅源电压 Gate-Source Voltage	V _{GSS}	±30			V
单脉冲雪崩能量 (注2) Single Pulsed Avalanche Energy (note 2)	E _{AS}	1688			mJ
雪崩电流 (注1) Avalanche Current (note 1)	I _{AR}	15			A
重复雪崩能量 (注1) Repetitive Avalanche Current (note 1)	E _{AR}	4.0			mJ
二极管反向恢复最大电压 变化速率 (注3) Peak Diode Recovery dv/dt (note 3)	dv/dt	9.8			V/n s
耗散功率 Power Dissipation	P _D T _C =25℃ -Derate above 25℃	245	53	43.3	W
		2.0	0.42	0.35	W/ ℃
最高结温及存储温度 Operating and Storage Temperature Range	T _J , T _{STG}	-55~+150			℃

*漏极电流由最高结温限制

*Drain current limited by maximum junction temperature

电特性 ELECTRICAL CHARACTERISTICS

项 目 Parameter	符 号 Symbol	测试条件 Tests conditions	最小 Min	典型 Typ	最大 Max	单 位 Units
关态特性 Off –Characteristics						
漏—源击穿电压 Drain-Source Voltage	BV_{DSS}	$I_D=250\mu A, V_{GS}=0V$	650	-	-	V
击穿电压温度特性 Breakdown Voltage Temperature Coefficient	$\Delta BV_{DSS}/\Delta T_J$	$I_D=1mA$, referenced to $25^\circ C$	-	0.79	-	V/ $^\circ C$
零栅压下漏极漏电流 Zero Gate Voltage Drain Current	I_{DSS}	$V_{DS}=650V, V_{GS}=0V,$ $T_C=25^\circ C$	-	-	10	μA
		$V_{DS}=520V, T_C=125^\circ C$	-	-	100	μA
正向栅极体漏电流 Gate-body leakage current, forward	I_{GSSF}	$V_{DS}=0V, V_{GS}=30V$	-	-	100	nA
反向栅极体漏电流 Gate-body leakage current, reverse	I_{GSSR}	$V_{DS}=0V, V_{GS}=-30V$	-	-	-100	nA
通态特性 On-Characteristics						
阈值电压 Gate Threshold Voltage	$V_{GS(th)}$	$V_{DS} = V_{GS}, I_D=250\mu A$	3.0	-	5.0	V
静态导通电阻 Static Drain-Source On-Resistance	$R_{DS(ON)}$	$V_{GS}=10V, I_D=7.5A$ $25^\circ C$	-	0.5	0.55	Ω
		$V_{GS}=10V, I_D=7.5A$ $100^\circ C$	-	0.88	1.20	Ω
		$V_{GS}=10V, I_D=7.5A$ $150^\circ C$	-	1.3	1.80	Ω
正向跨导 Forward Transconductance	g_{fs}	$V_{DS} = 40V, I_D=7.5A$ (note 4)	-	11.0	-	S
动态特性 Dynamic Characteristics						
栅极电阻 Gate resistance	R_g	F=1.0MHz open drain	0.4	-	2.6	Ω
输入电容 Input capacitance	C_{iss}	$V_{DS}=25V,$ $V_{GS}=0V$ $f=1.0MHz$	1000	2080	2600	pF
输出电容 Output capacitance	C_{oss}		50	200	350	pF
反向传输电容 Reverse transfer capacitance	C_{rss}		2	10	40	pF

电特性 ELECTRICAL CHARACTERISTICS

开关特性 Switching Characteristics						
项 目 Parameter	符 号 Symbol	测试条件 Tests conditions	最大 Min	典型 Typ	最大 Max	单 位 Units
延迟时间 Turn-On delay time	$t_d(\text{on})$	$V_{DD}=325V, I_D=15A, R_G=25\Omega$ (note 4, 5)	-	48	60	ns
上升时间 Turn-On rise time	t_r		-	116.8	155	ns
延迟时间 Turn-Off delay time	$t_d(\text{off})$		-	64	90	ns
下降时间 Turn-Off Fall time	t_f		-	41.6	62	ns
栅极电荷总量 Total Gate Charge	Q_g		$V_{DS}=520V,$	-	35.2	75
栅-源电荷 Gate-Source charge	Q_{gs}	$I_D=15A$	-	11.9	25	nC
栅-漏电荷 Gate-Drain charge	Q_{gd}	$V_{GS}=10V$ (note 4, 5)	-	13.9	30	nC
漏-源二极管特性及最大额定值 Drain-Source Diode Characteristics and Maximum Ratings						
正向最大连续电流 Maximum Continuous Drain-Source Diode Forward Current		I_S	-	-	15	A
正向最大脉冲电流 Maximum Pulsed Drain-Source Diode Forward Current		I_{SM}	-	-	60	A
正向压降 Drain-Source Diode Forward Voltage	V_{SD}	$V_{GS}=0V, I_S=15.0A$	-	-	1.4	V
反向恢复时间 Reverse recovery time	t_{rr}	$V_{GS}=0V, I_S=15.0A$	-	853	1500	ns
反向恢复电荷 Reverse recovery charge	Q_{rr}	$di_F/dt=100A/\mu s$ (note 4)	-	5.84	15	μC

热特性 THERMAL CHARACTERISTIC

项 目 Parameter	符 号 Symbol	最大 Max			单 位 Unit
		JCS15N65CH /BH/SH	JCS15N65FH TO-220MF	JCS15N65FH TO-220MF-K 2/K4	
结到管壳的热阻 Thermal Resistance, Junction to Case	$R_{th(j-c)}$	0.51	2.36	2.89	$^{\circ}C/W$
结到环境的热阻 Thermal Resistance, Junction to Ambient	$R_{th(j-A)}$	62.5	62.5	67.1	$^{\circ}C/W$

注释:

- 1: 脉冲宽度由最高结温限制
- 2: $L=15mH, I_{AS}=15A, V_{DD}=50V, R_G=25\Omega$, 起始结温 $T_J=25^{\circ}C$
- 3: $I_{SD} \leq 15A, di/dt \leq 300A/\mu s, V_{DD} \leq BV_{DSS}$, 起始结温 $T_J=25^{\circ}C$
- 4: 脉冲测试: 脉冲宽度 $\leq 300\mu s$, 占空比 $\leq 2\%$
- 5: 基本与工作温度无关


版本: 201907F

Notes:


- 1: Pulse width limited by maximum junction temperature
- 2: $L=15mH, I_{AS}=15A, V_{DD}=50V, R_G=25\Omega$, Starting $T_J=25^{\circ}C$
- 3: $I_{SD} \leq 15A, di/dt \leq 300A/\mu s, V_{DD} \leq BV_{DSS}$, Starting $T_J=25^{\circ}C$
- 4: Pulse Test: Pulse Width $\leq 300\mu s$, Duty Cycles $\leq 2\%$
- 5: Essentially independent of operating temperature

特征曲线 ELECTRICAL CHARACTERISTICS (curves)


On-Region Characteristics

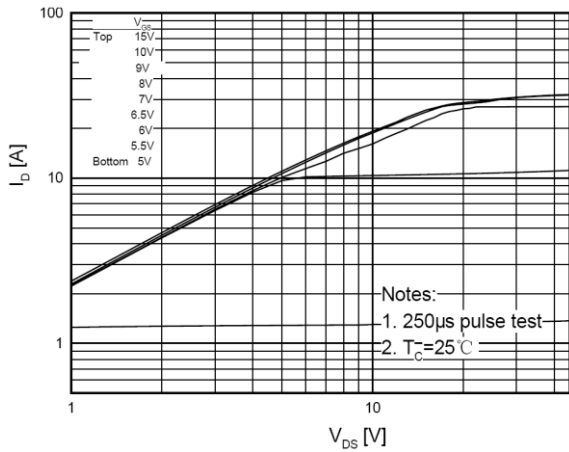


Transfer Characteristics

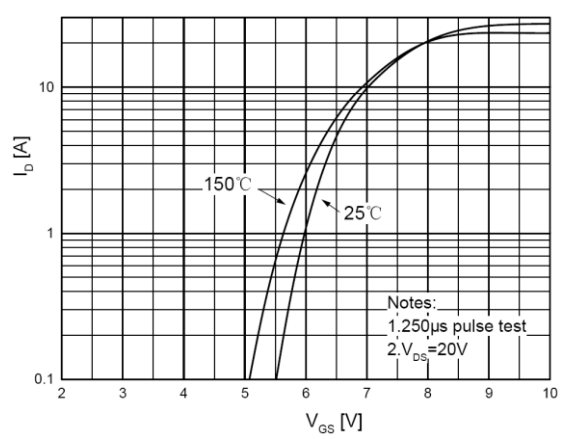


On-Resistance Variation vs. Drain Current and Gate Voltage

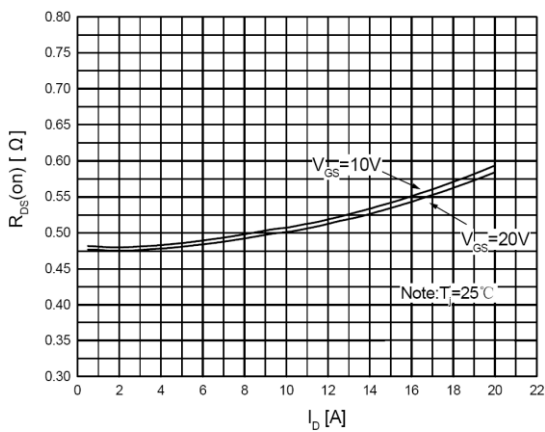


Body Diode Forward Voltage Variation vs. Source Current and Temperature

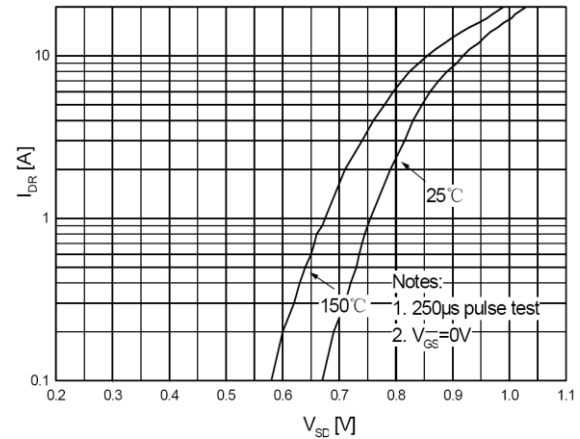

Capacitance Characteristics

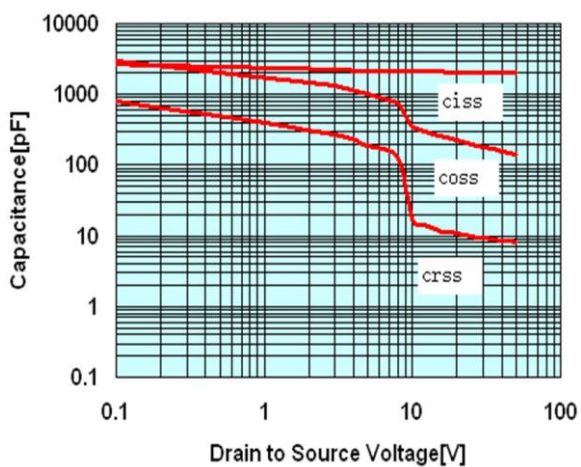


Gate Charge Characteristics

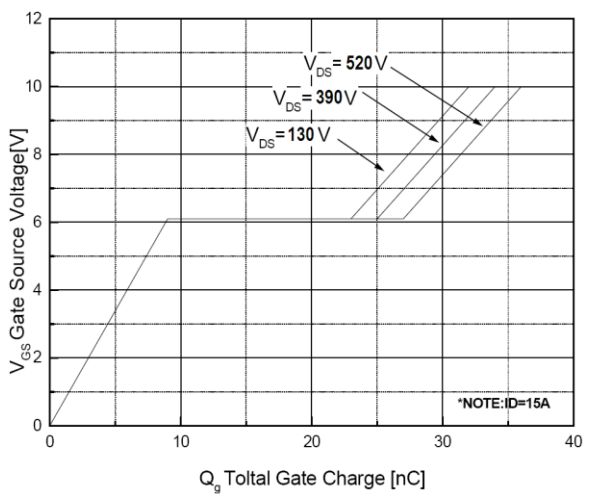


特征曲线 ELECTRICAL CHARACTERISTICS (curves)

Breakdown Voltage Variation vs. Temperature

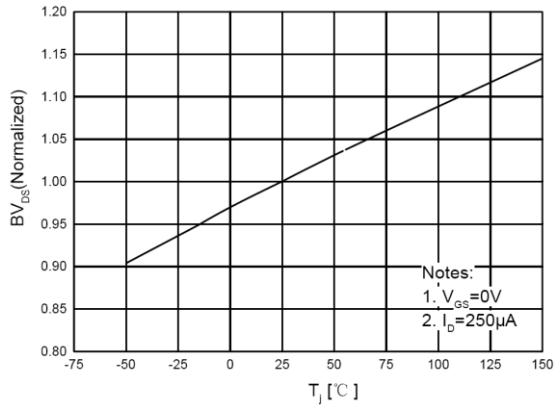


On-Resistance Variation vs. Temperature

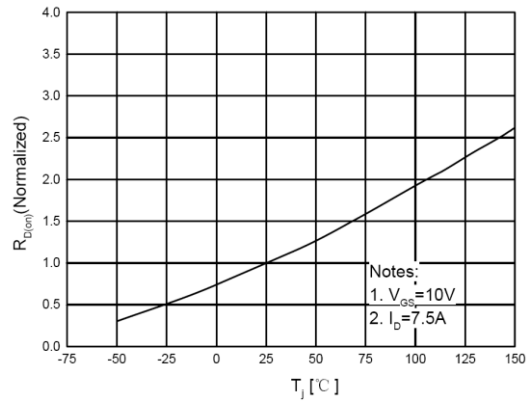


Maximum Safe Operating Area For JCS15N65FH(TO-220MF/K2/K4)




Maximum Safe Operating Area For JCS15N65CH/BH/SH

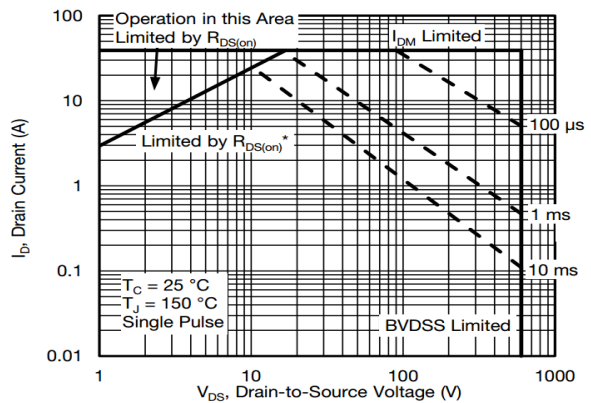

Maximum Drain Current vs. Case Temperature

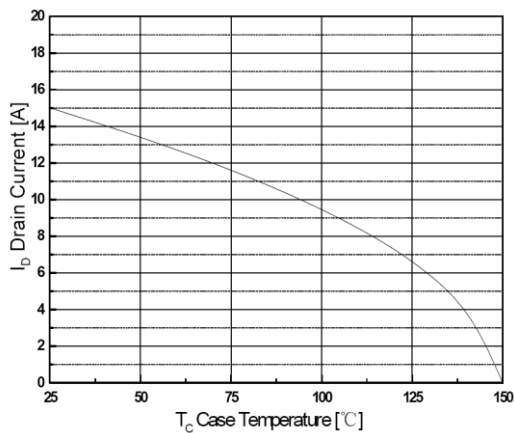


Power Dissipation vs. Temperature

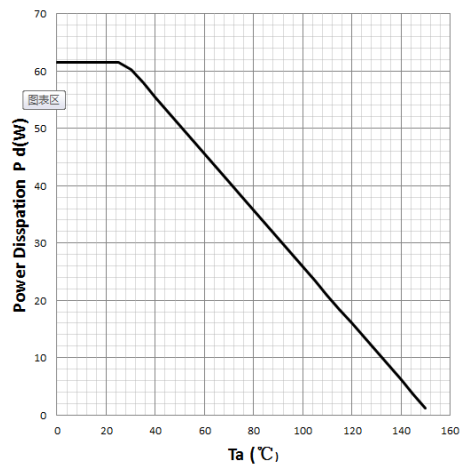


特征曲线 ELECTRICAL CHARACTERISTICS (curves)

Transient Thermal Response Curve
For JCS15N65FH(TO-220MF/K2/K4)

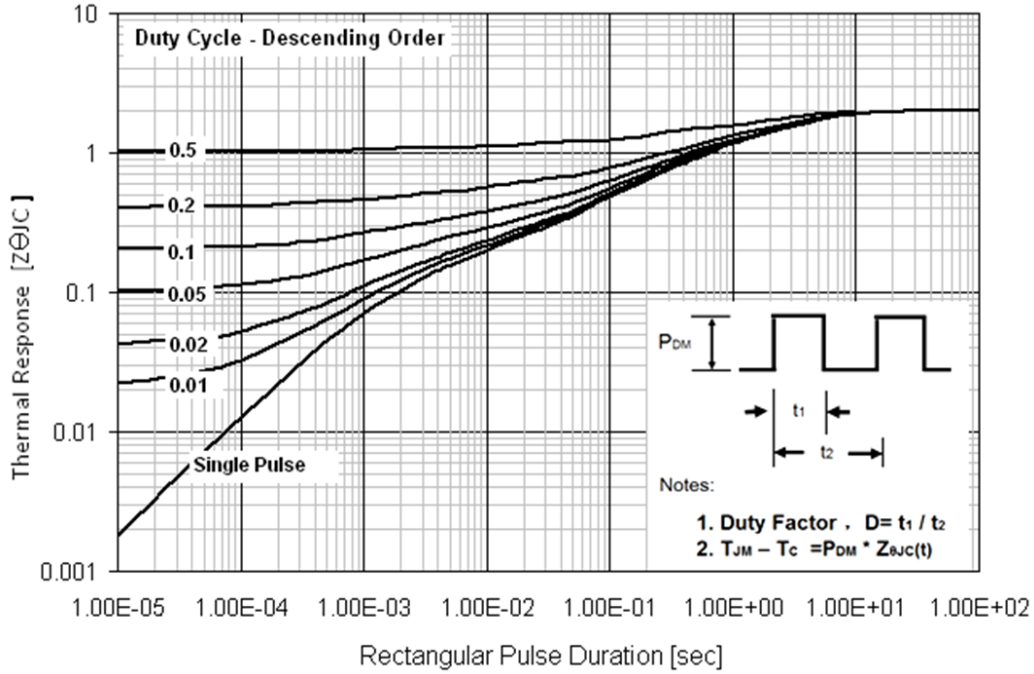


Transient Thermal Response Curve
For JCS15N65CH/BH/SH

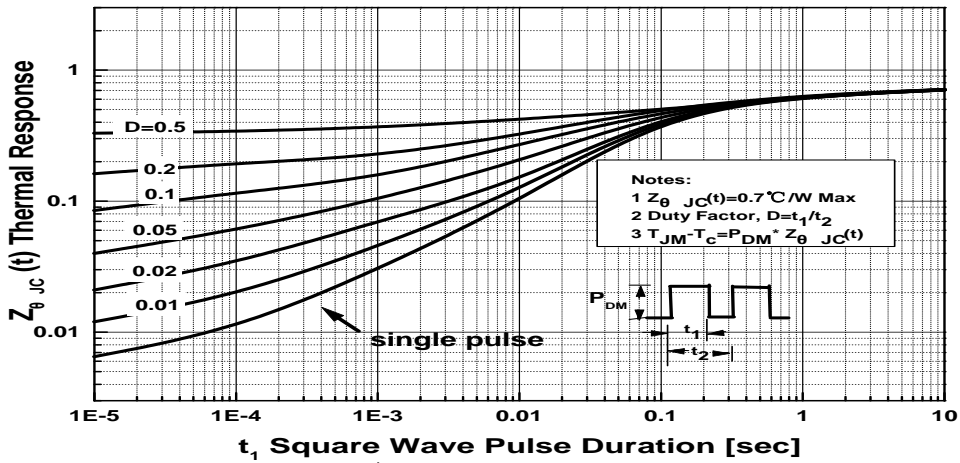

外形尺寸 PACKAGE MECHANICAL DATA

TO-220MF

单位 Unit: mm

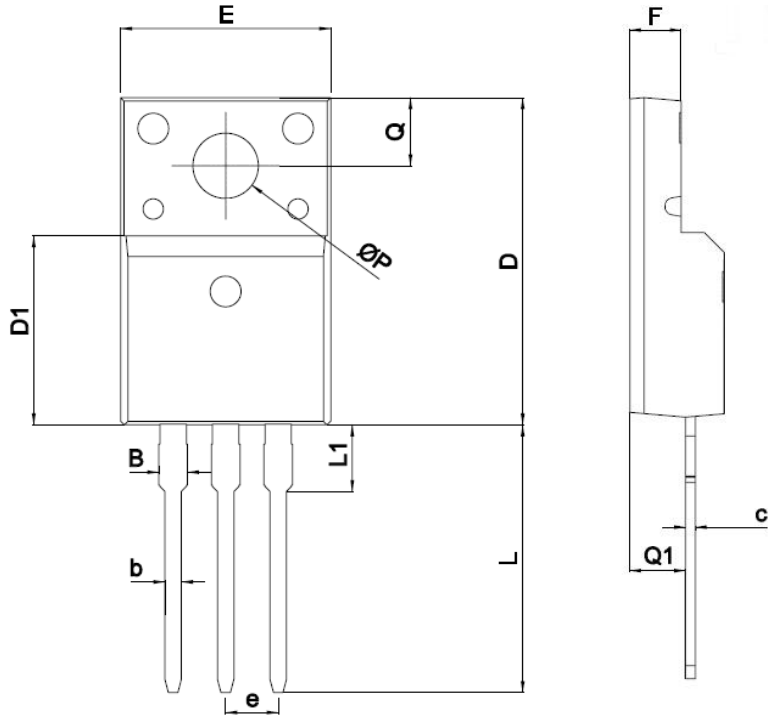


SYMBOL	mm	
	MIN	MAX
A	4.5	4.9
B		1.47
b	0.7	0.9
c	0.45	0.60
D	15.67	16.07
D1	9.04	9.20
e	2.54TYPE	
E	9.96	10.36
F	2.34	2.74
L	12.58	13.38
L1	3.13	3.33
Q	3.2	3.4
Q1	2.56	2.96
ΦP	3.08	3.28



外形尺寸 PACKAGE MECHANICAL DATA

TO-220MF-K2

单位 Unit: mm

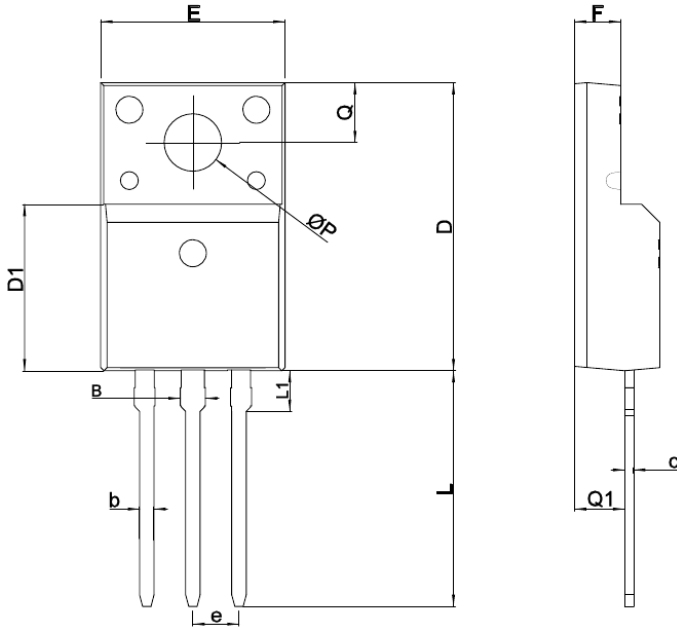


SYMBOL	mm	
	MIN	MAX
A	4.5	4.9
B		1.27
b	0.59	0.79
c	0.45	0.60
D	15.67	16.07
D1	8.97	9.37
e	2.54TYPE	
E	9.96	10.36
F	2.34	2.74
L	12.65	13.35
L1	1.80	2.20
Q	3.2	3.4
Q1	2.56	2.96
ΦP	3.08	3.28



外形尺寸 PACKAGE MECHANICAL DATA

TO-220MF-K4

单位 Unit: mm

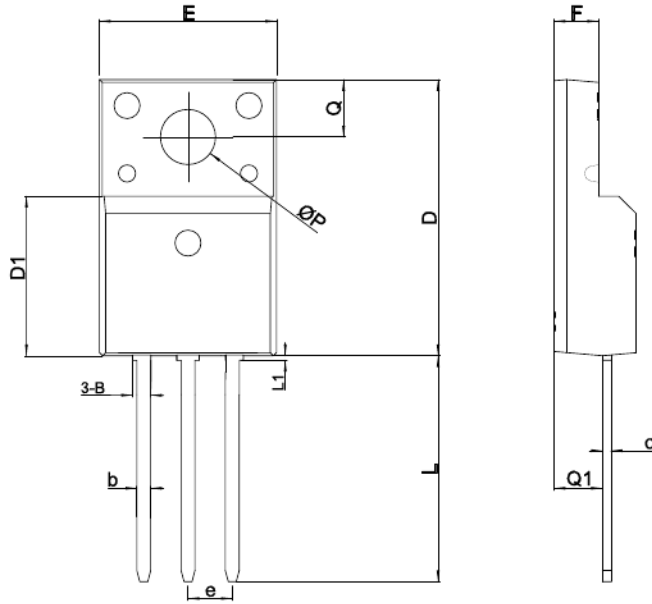


SYMBOL	mm	
	MIN	MAX
A	4.5	4.9
B	1.04	1.24
b	0.59	0.79
c	0.45	0.60
D	15.67	16.07
D1	8.97	9.37
e	2.54TYPE	
E	9.96	10.36
F	2.34	2.74
L	12.65	13.35
L1	MAX 0.95	
Q	3.2	3.4
Q1	2.56	2.96
ΦP	3.08	3.28


外形尺寸 PACKAGE MECHANICAL DATA

TO-262

单位 Unit: mm

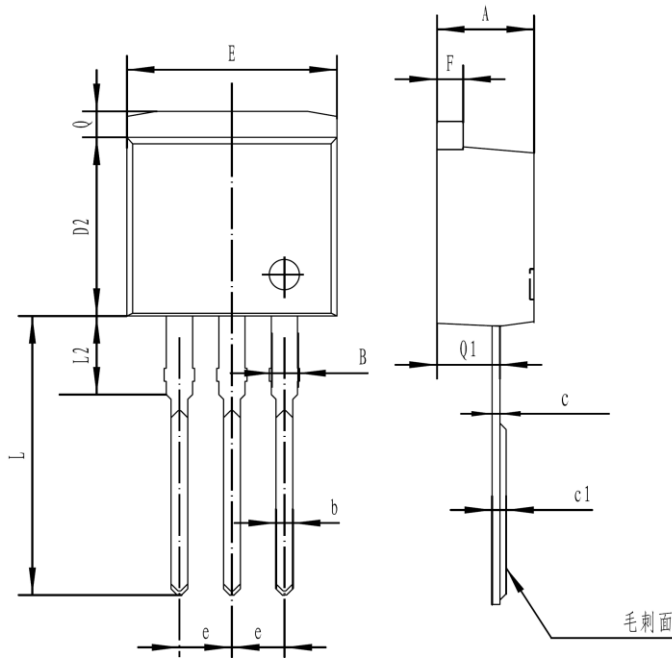


符号 symbol	MIN	MAX
A	4.40	4.90
B	1.10	1.40
b	0.70	0.95
c	0.30	0.60
c1	0.33	0.63
D2	8.20	9.20
E	9.60	10.50
e	2.39	2.69
F	1.20	1.35
L	13.11	14.61
L2	3.55	4.05
Q	1.10	1.40
Q1	2.65	2.85





外形尺寸 PACKAGE MECHANICAL DATA

TO-263

单位 Unit: mm

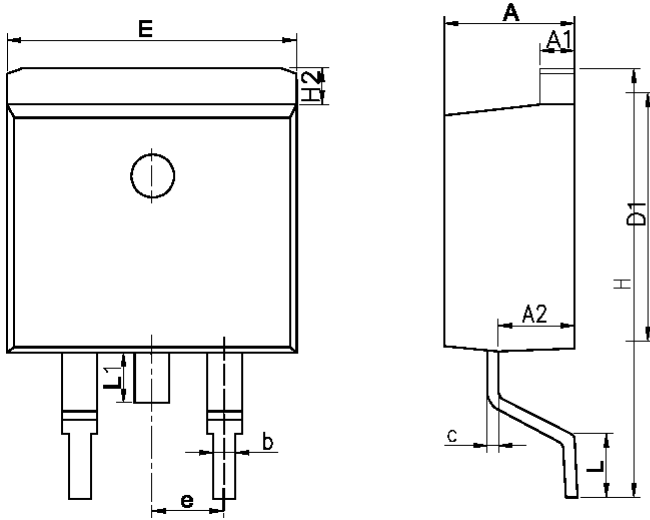

SYMBOL	MM	
	MIN	MAX
A	4.30	4.80
A1	1.12	1.42
A2	2.54	2.84
b	0.67	1.00
c	0.28	0.52
D1	8.40	9.00
E	9.80	10.46
e	2.54BSC	
H	14.00	16.00
H2	1.12	1.45
L	1.50	3.10
L1	1.45	1.70

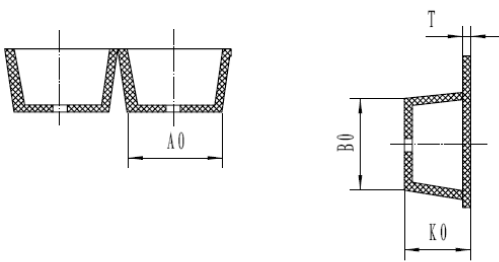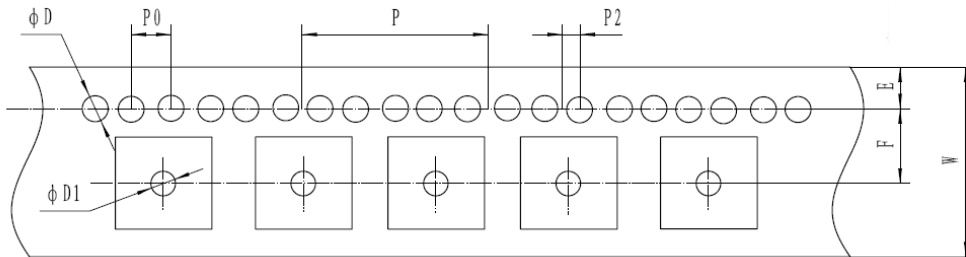


产品尺寸规格 (UNIT: mm)				
规格	W	A0	E	D
尺寸	24 ± 0.3	10.9 ± 0.1	1.75 ± 0.1	11.5 ± 0.1
规格	D1	P0	P2	P
尺寸	1.5 +0.1/-0	4 ± 0.1	2 ± 0.1	16 ± 0.1
规格	K0	B0		T
尺寸	4.9 ± 0.1	16.0 ± 0.1		0.35 ± 0.05

外形尺寸 PACKAGE MECHANICAL DATA

TO-220C

单位 Unit: mm

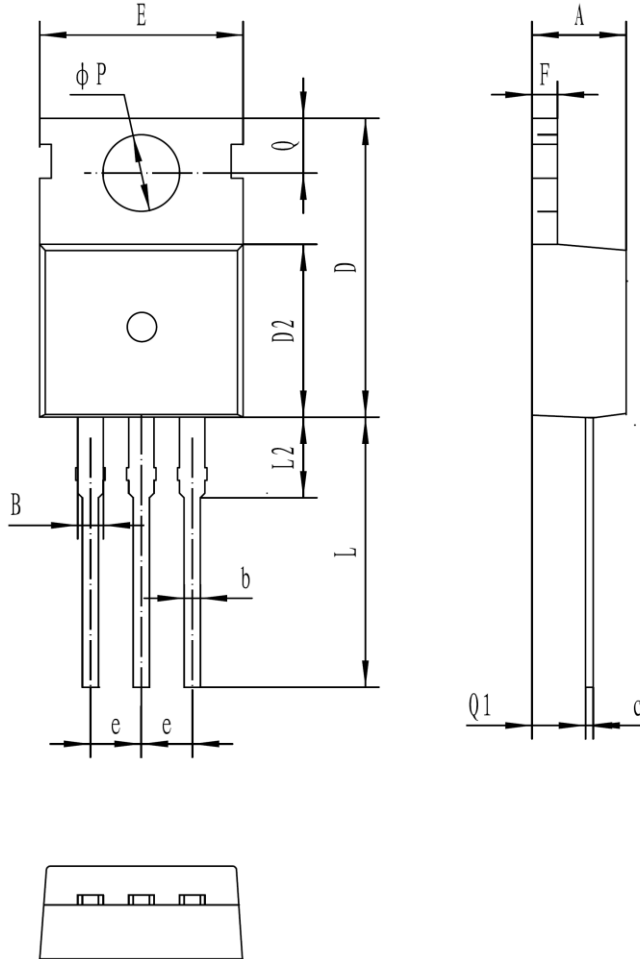

符号 symbol	MIN	MAX
A	4.30	4.70
B	1.10	1.40
b	0.70	0.95
c	0.40	0.65
D	15.20	16.20
D2	9.00	9.40
E	9.70	10.10
e	2.39	2.69
F	1.25	1.40
L	12.60	13.60
L2	2.80	3.20
Q	2.60	3.00
Q1	2.20	2.60
P	3.50	3.80