

# JCS9N90T

## 主要参数 MAIN CHARACTERISTICS

<b>ID</b>	<b>9 A</b>
<b>V<sub>DSS</sub></b>	<b>900 V</b>
<b>R<sub>dson-max</sub></b> (V <sub>GS</sub> =10V)	<b>1.35 Ω</b>
<b>Q<sub>G</sub></b>	<b>43 nC</b>

## 用途

- 高频开关电源
- 电子镇流器
- LED 电源

## APPLICATIONS

- High efficiency switch mode power supplies
- Electronic lamp ballasts based on half bridge
- LED power supplies

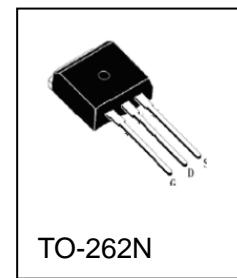
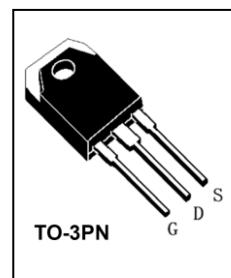
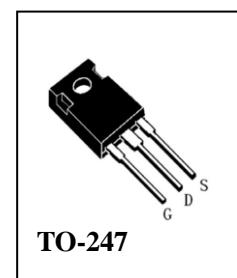
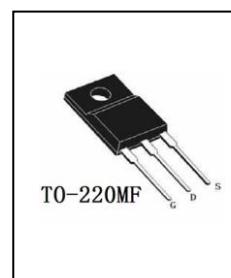

## 产品特性

- 低栅极电荷
- 低 C<sub>rss</sub> (典型值 13pF)
- 开关速度快
- 产品全部经过雪崩测试
- 高抗 dv/dt 能力
- RoHS 产品

## FEATURES

- Low gate charge
- Low C<sub>rss</sub> (typical 13pF)
- Fast switching
- 100% avalanche tested
- Improved dv/dt capability
- RoHS product

## 封装 Package



## 订货信息 ORDER MESSAGE

订货型号 Order codes				印 记 Marking	封 装 Package
有卤-条管 Halogen-Tube	无卤-条管 Halogen-Free-Tube	有卤-编带 Halogen-Reel	无卤-编带 Halogen-Free-Reel		
JCS9N90FT-F-B	JCS9N90FT-F-BR	N/A	N/A	JCS9N90FT	TO-220MF
JCS9N90WT-GE-B	JCS9N90WT-GE-BR	N/A	N/A	JCS9N90WT	TO-247
JCS9N90ANT-GD-B	JCS9N90ANT-GD-BR	N/A	N/A	JCS9N90ANT	TO-3PN
JCS9N90BT-BP-B	JCS9N90BT-BP-BR	N/A	N/A	JCS9N90BT	TO-262N

**绝对最大额定值 ABSOLUTE RATINGS (Tc=25°C)**

项 目 Parameter	符 号 Symbol	数 值 Value			单 位 Unit
		JCS9N90FT	JCS9N90WT/BT	JCS9N90ANT	
最高漏极—源极直流电压 Drain-Source Voltage	V <sub>DSS</sub>	900			V
连续漏极电流 Drain Current -continuous	I <sub>D</sub>	9			A
	T=25°C T=100°C	6.0*			A
最大脉冲漏极电流 (注 1) Drain Current - pulse (note 1)	I <sub>DM</sub>	36			A
最高栅源电压 Gate-Source Voltage	V <sub>GSS</sub>	±30			V
单脉冲雪崩能量 (注 2) Single Pulsed Avalanche Energy (note 2)	E <sub>AS</sub>	858			mJ
雪崩电流 (注 1) Avalanche Current (note 1)	I <sub>AR</sub>	9			A
重复雪崩能量 (注 1) Repetitive Avalanche Current (note 1)	E <sub>AR</sub>	27.7			mJ
二极管反向恢复最大电压变化速率 (注 3) Peak Diode Recovery dv/dt (note 3)	dv/dt	4.1			V/ns
耗散功率 Power Dissipation	P <sub>D</sub>	36	123.2	186.5	W
	T <sub>C</sub> =25°C -Derate above 25°C	0.288	0.986	1.492	W/°C
最高结温及存储温度 Operating and Storage Temperature Range	T <sub>J</sub> , T <sub>STG</sub>	-55~+150			°C
引线最高焊接温度 Maximum Lead Temperature for Soldering Purposes	T <sub>L</sub>	300			°C

\*漏极电流由最高结温限制

\*Drain current limited by maximum junction temperature

**电特性 ELECTRICAL CHARACTERISTICS**

项目 Parameter	符号 Symbol	测试条件 Tests conditions	最小 Min	典型 Typ	最大 Max	单位 Units
<b>关态特性 Off -Characteristics</b>						
漏—源击穿电压 Drain-Source Voltage	$BV_{DSS}$	$I_D=250\mu A, V_{GS}=0V$	900	-	-	V
击穿电压温度特性 Breakdown Voltage Temperature Coefficient	$\Delta BV_{DSS}/\Delta T_J$	$I_D=250\mu A$ , referenced to $25^\circ C$	-	0.98	-	V/ $^\circ C$
零栅压下漏极漏电流 Zero Gate Voltage Drain Current	$I_{DSS}$	$V_{DS}=900V, V_{GS}=0V, T_C=25^\circ C$	-	-	1	$\mu A$
		$V_{DS}=720V, T_C=125^\circ C$	-	-	10	$\mu A$
正向栅极体漏电流 Gate-body leakage current, forward	$I_{GSSF}$	$V_{DS}=0V, V_{GS}=30V$	-	-	100	nA
反向栅极体漏电流 Gate-body leakage current, reverse	$I_{GSSR}$	$V_{DS}=0V, V_{GS}=-30V$	-	-	-100	nA
<b>通态特性 On-Characteristics</b>						
阈值电压 Gate Threshold Voltage	$V_{GS(th)}$	$V_{DS}=V_{GS}, I_D=250\mu A$	3.0	-	5.0	V
静态导通电阻 Static Drain-Source On-Resistance	$R_{DS(ON)}$	$V_{GS}=10V, I_D=4.5A$ $25^\circ C$	-	1.18	1.35	$\Omega$
		$V_{GS}=10V, I_D=4.5A$ $100^\circ C$	-	2.07	2.50	$\Omega$
		$V_{GS}=10V, I_D=4.5A$ $150^\circ C$	-	3.07	3.60	$\Omega$
正向跨导 Forward Transconductance	$g_{fs}$	$V_{DS}=40V, I_D=4.5A$ (note 4)	-	9.5	-	S
<b>动态特性 Dynamic Characteristics</b>						
栅极电阻 Gate resistance	$R_g$	$f=1.0MHz$ open drain	0.5	-	3.0	$\Omega$
输入电容 Input capacitance	$C_{iss}$	$V_{DS}=25V, V_{GS}=0V,$ $f=1.0MHz$	1200	2150	2830	pF
输出电容 Output capacitance	$C_{oss}$		100	189	246	pF
反向传输电容 Reverse transfer capacitance	$C_{rss}$		5	13	17	pF

## 电特性 ELECTRICAL CHARACTERISTICS

开关特性 Switching Characteristics							
延迟时间 Turn-On delay time	$t_{d(on)}$	$V_{DD}=450V, I_D=9A, R_G=25\Omega$ (note 4, 5)	-	53	121	ns	
上升时间 Turn-On rise time	$t_r$		-	116	235	ns	
延迟时间 Turn-Off delay time	$t_{d(off)}$		-	97	199	ns	
下降时间 Turn-Off Fall time	$t_f$		-	69	171	ns	
栅极电荷总量 Total Gate Charge	$Q_g$	$V_{DS}=720V, I_D=9A$ $V_{GS}=10V$ (note 4, 5)	-	43	56	nC	
栅一源电荷 Gate-Source charge	$Q_{gs}$		-	15	40	nC	
栅一漏电荷 Gate-Drain charge	$Q_{gd}$		-	21	50	nC	
漏一源二极管特性及最大额定值 Drain-Source Diode Characteristics and Maximum Ratings							
正向最大连续电流 Maximum Continuous Drain -Source Diode Forward Current	$I_S$			-	-	9 A	
正向最大脉冲电流 Maximum Pulsed Drain-Source Diode Forward Current	$I_{SM}$			-	-	36 A	
正向压降 Drain-Source Diode Forward Voltage	$V_{SD}$	$V_{GS}=0V, I_S=9A$	-	-	1.4	V	
反向恢复时间 Reverse recovery time	$t_{rr}$	$V_{GS}=0V, I_S=9A$ $dI_F/dt=100A/\mu s$ (note 4)	-	539	1200	ns	
反向恢复电荷 Reverse recovery charge	$Q_{rr}$		-	6.41	15	$\mu C$	

## 热特性 THERMAL CHARACTERISTIC

项 目 Parameter	符 号 Symbol	最 大 Max			单 位 Unit
		JCS9N90FT	JCS9N90WT /BT	JCS9N90ANT	
结到管壳的热阻 Thermal Resistance, Junction to Case	$R_{th(j-c)}$	3.47	1.01	0.67	°C/W
结到环境的热阻 Thermal Resistance, Junction to Ambient	$R_{th(j-A)}$	62.5	50	40	°C/W

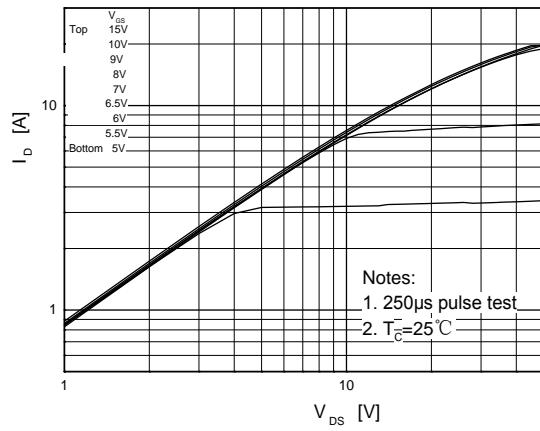
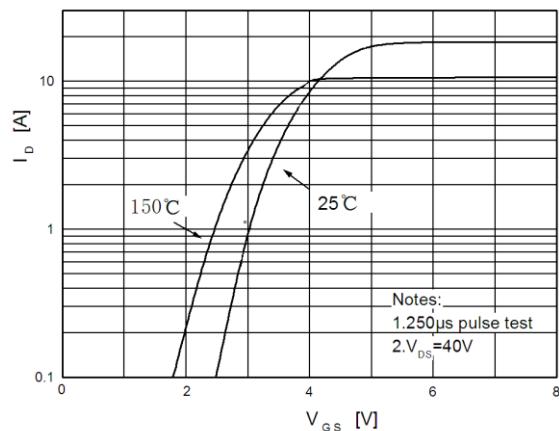
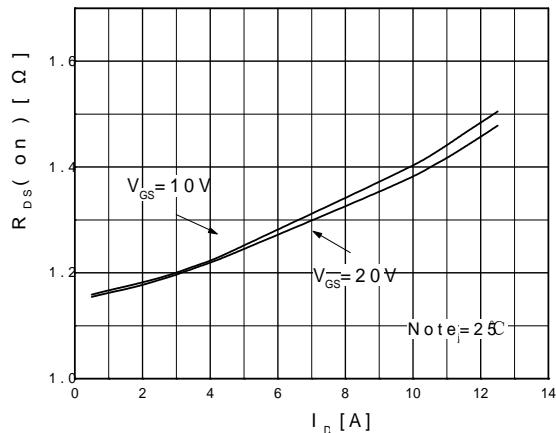
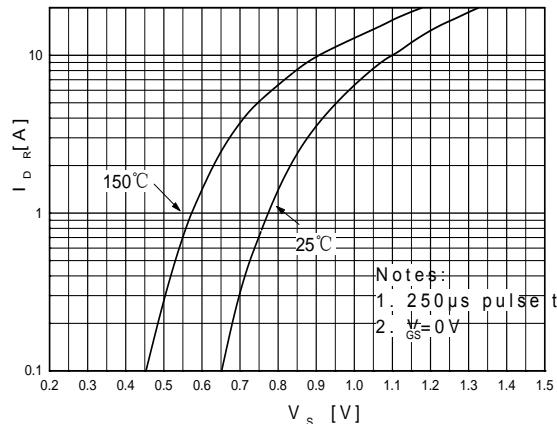
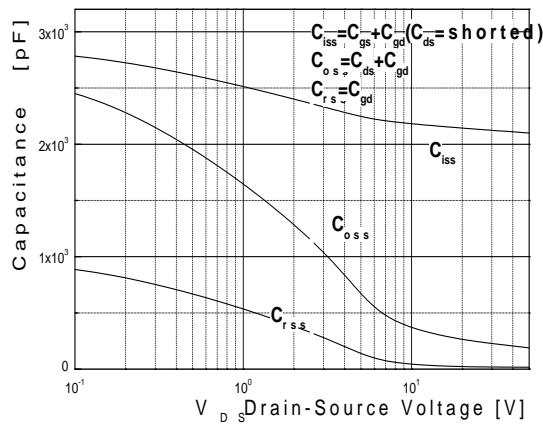
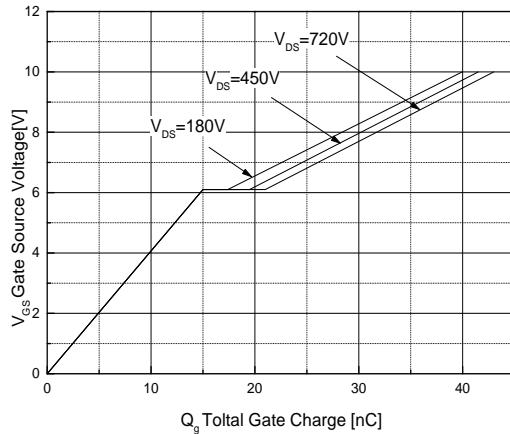
注释:







- 1: 脉冲宽度由最高结温限制
- 2:  $L=20mH, I_{AS}=9A, V_{DD}=50V, R_G=25\Omega$ , 起始结温  $T_J=25^\circ C$
- 3:  $I_{SD} \leq 9A, di/dt \leq 200A/\mu s, VDD \leq BV_{DSS}$ , 起始结温  $T_J=25^\circ C$
- 4: 脉冲测试: 脉冲宽度  $\leq 300\mu s$ , 占空比  $\leq 2\%$
- 5: 基本与工作温度无关

版本: 201811C



Notes:

- 1: Pulse width limited by maximum junction temperature
- 2:  $L=20mH, I_{AS}=9A, V_{DD}=50V, R_G=25\Omega$ , Starting  $T_J=25^\circ C$
- 3:  $I_{SD} \leq 9A, di/dt \leq 200A/\mu s, VDD \leq BV_{DSS}$ , Starting  $T_J=25^\circ C$
- 4: Pulse Test: Pulse Width  $\leq 300\mu s$ , Duty Cycle  $\leq 2\%$
- 5: Essentially independent of operating temperature

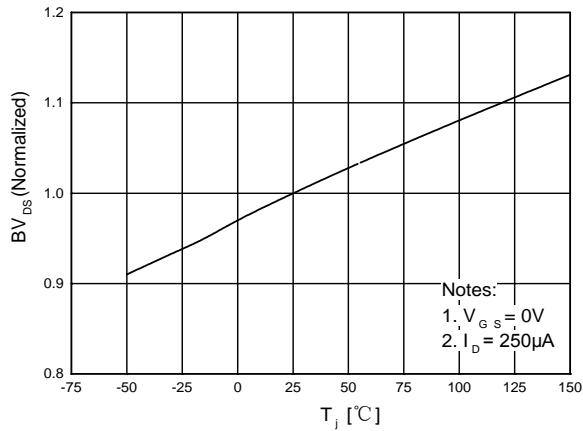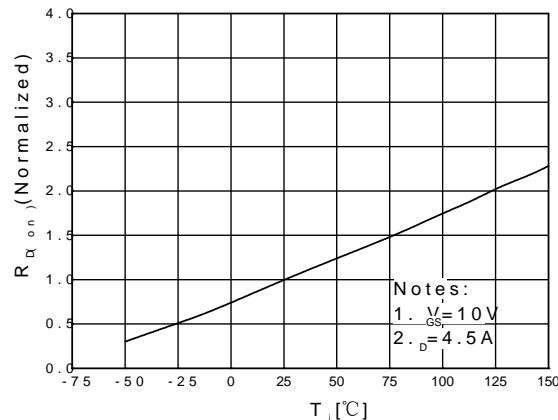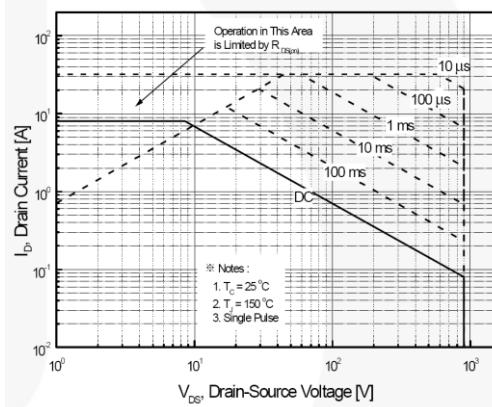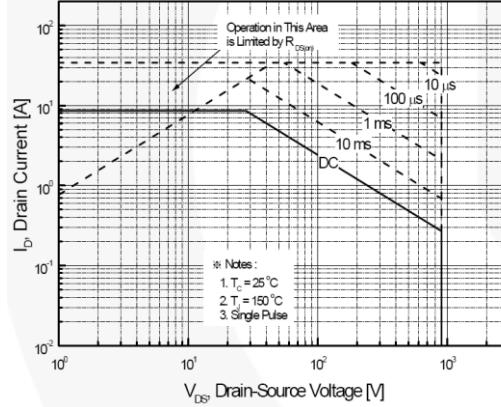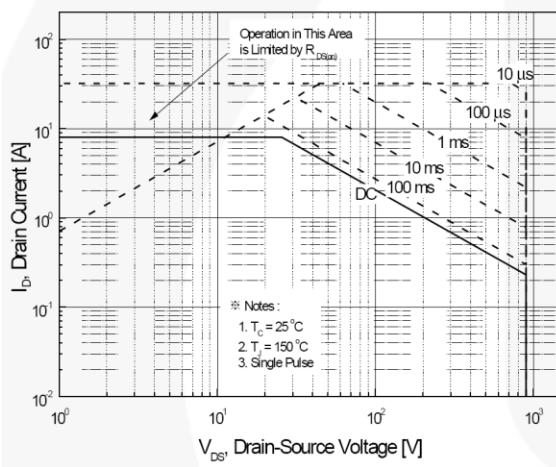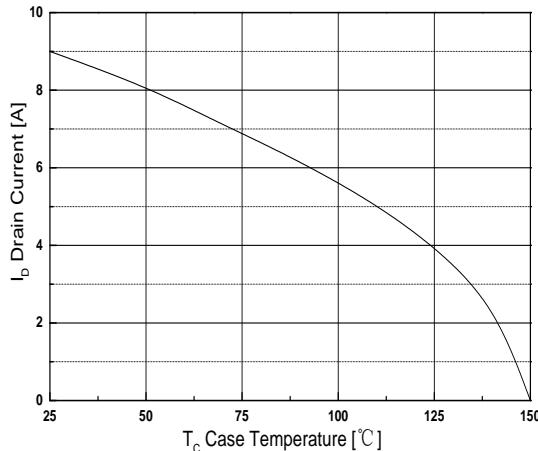**特征曲线 ELECTRICAL CHARACTERISTICS (curves)**
**On-Region Characteristics**

**Transfer Characteristics**

**On-Resistance Variation vs. Drain Current and Gate Voltage**

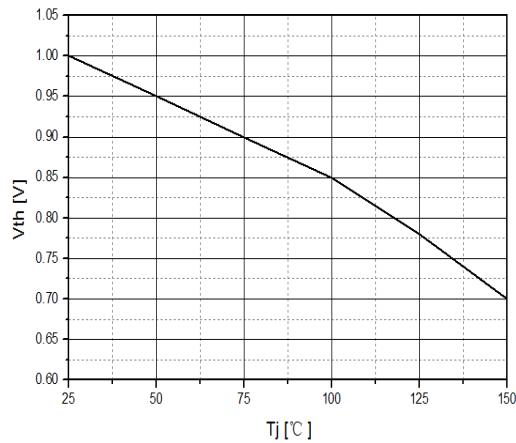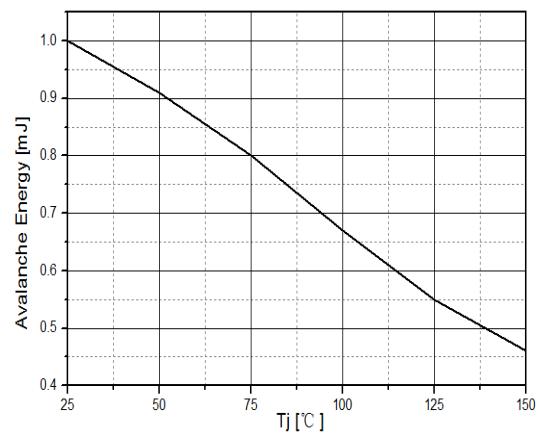**Body Diode Forward Voltage Variation vs. Source Current and Temperature**

**Capacitance Characteristics**

**Gate Charge Characteristics**


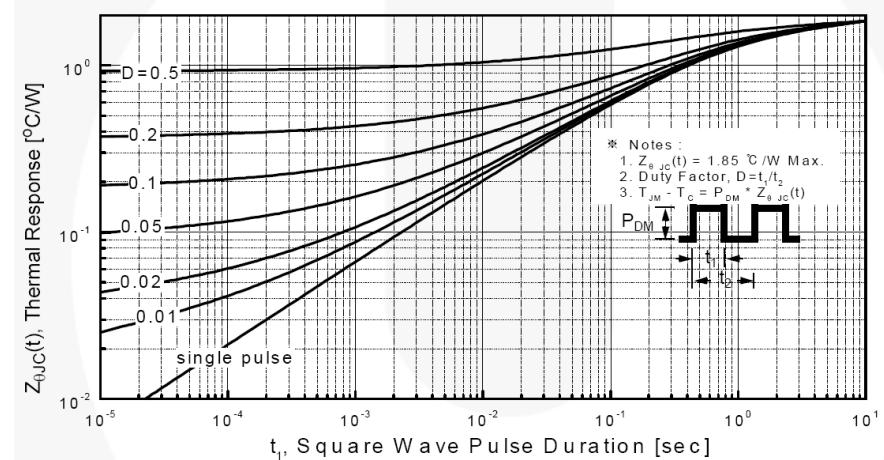
**特征曲线 ELECTRICAL CHARACTERISTICS (curves)**
**Breakdown Voltage Variation  
vs. Temperature**

**On-Resistance Variation  
vs. Temperature**

**Maximum Safe Operating Area  
JCS9N90FT**

**Maximum Safe Operating Area  
JCS9N90WT/BT**

**Maximum Safe Operating Area  
JCS9N90ANT**

**Maximum Drain Current  
vs. Case Temperature**


## 特征曲线 ELECTRICAL CHARACTERISTICS (curves)

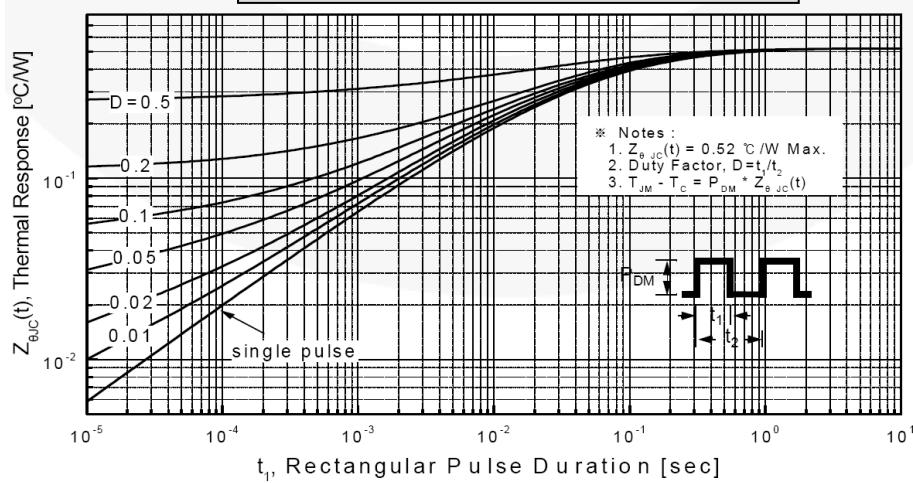
Gate Threshold Voltage Variation  
vs. TemperatureSingle Pulsed Avalanche Energy  
Variation vs. Temperature

## 特征曲线 ELECTRICAL CHARACTERISTICS (curves)


**Transient Thermal Response Curve  
JCS9N90FT**



**Transient Thermal Response Curve  
JCS9N90WT/BT**




## 特征曲线 ELECTRICAL CHARACTERISTICS (curves)

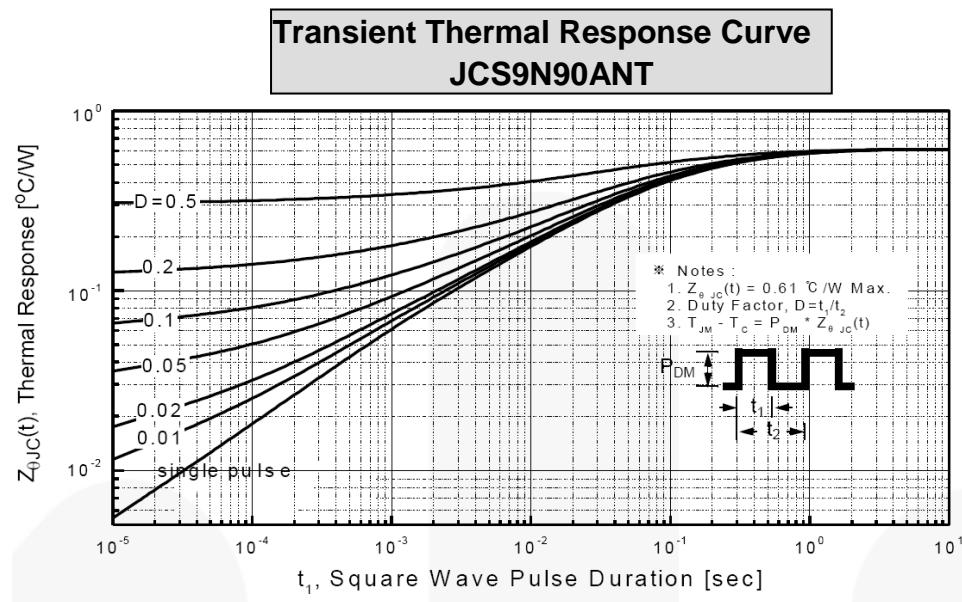


## 外形尺寸 PACKAGE MECHANICAL DATA

TO-220MF

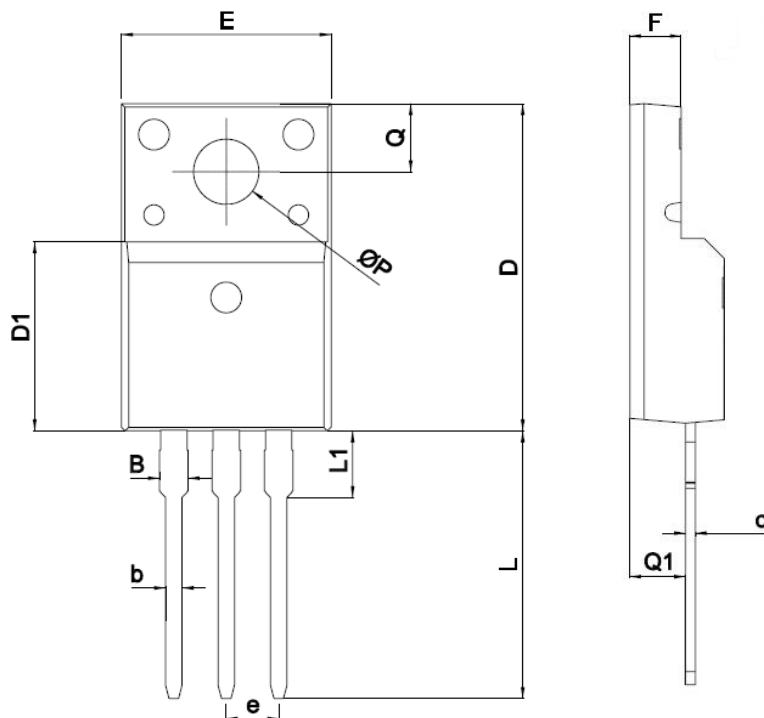单位 Unit: mm




SYMBOL	mm	
	MIN	MAX
A	4.5	4.9
B		1.47
b	0.7	0.9
c	0.45	0.60
D	15.67	16.07
D1	9.04	9.20
e	2.54TYPE	
E	9.96	10.36
F	2.34	2.74
L	12.58	13.38
L1	3.13	3.33
Q	3.2	3.4
Q1	2.56	2.96
ΦP	3.08	3.28

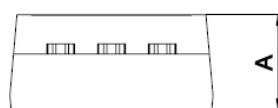

## 形尺寸 PACKAGE MECHANICAL DATA

TO-247

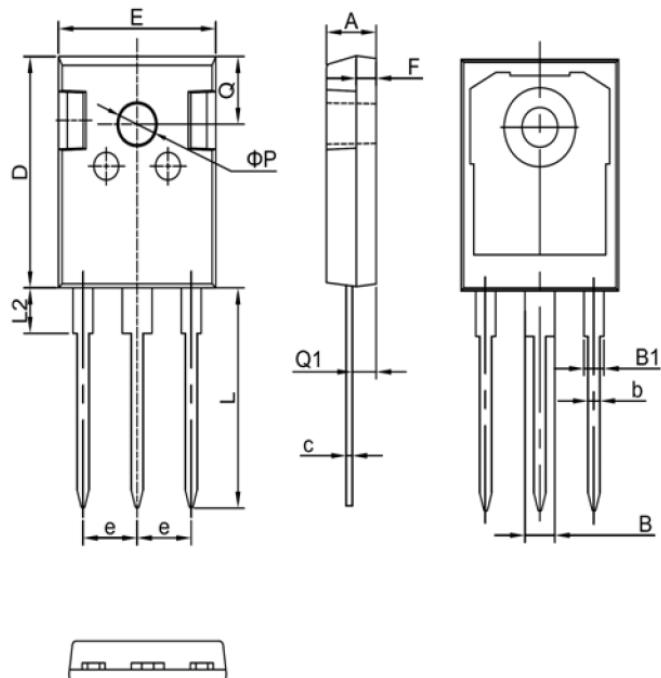单位 Unit: mm




符号 symbol	MIN	MAX
A	4.90	5.10
B	2.95	3.35
B1	1.95	2.35
b	1.15	1.35
c	0.50	0.70
D	20.90	21.10
E	15.70	15.90
e	5.34	5.54
F	1.90	2.10
L	19.40	20.40
L2	4.03	4.23
Q	6.00	6.40
Q1	2.30	2.50
P	3.50	3.70

## 外形尺寸 PACKAGE MECHANICAL DATA

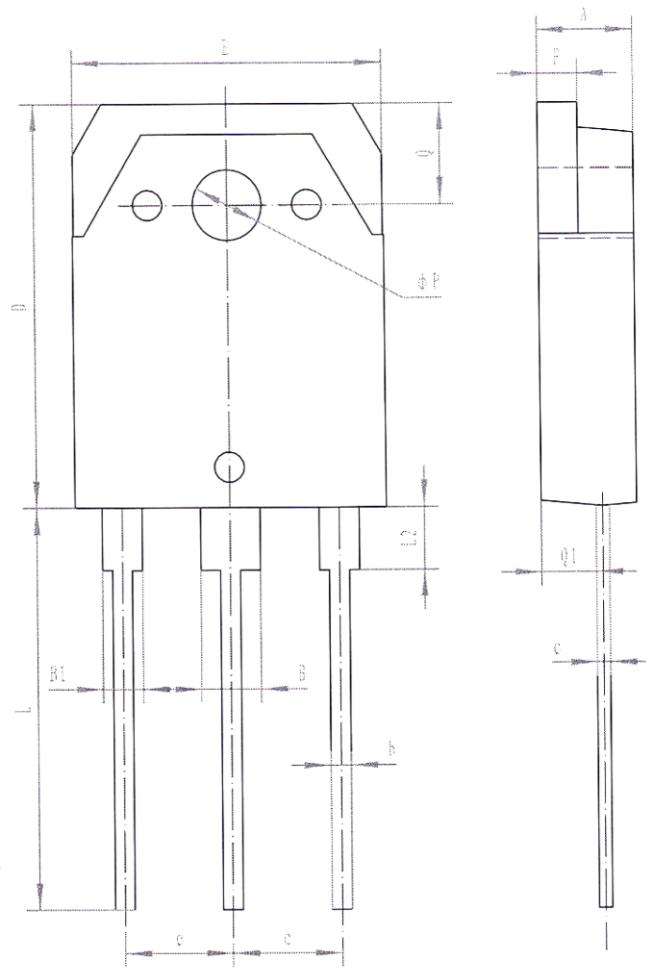TO-3PN

单位 Unit : mm




符号 symbol	MIN	MAX
A	4.55	4.95
B	2.90	3.20
B1	1.90	2.20
b	0.90	1.10
c	0.40	0.80
D	19.70	20.10
E	15.30	15.70
e	5.45(TYP)	
F	1.90	2.10
L	19.50	20.50
L2	3.05	3.25
Q	4.90	5.10
Q1	2.60	3.00
P	3.30	3.70



## 外形尺寸 PACKAGE MECHANICAL DATA

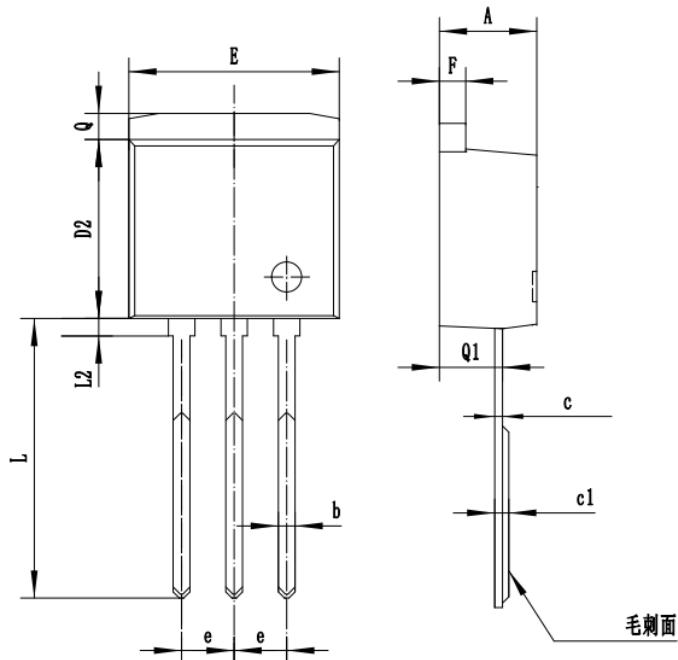TO-262N

单位 Unit: mm



符号 symbol	MIN	MAX
A	4.40	4.90
b	0.70	0.95
c	0.30	0.60
c1	0.33	0.63
D2	8.20	9.20
E	9.60	10.50
e	2.39	2.69
F	1.20	1.35
L	13.11	14.61
L2		0.85
Q	1.10	1.40
Q1	2.65	2.85

单位: mm

